



2E Φ3x7 RoHS Compliant



超小型保险丝(延时型)



Micro Fuse(Time-Lag)250V/125V

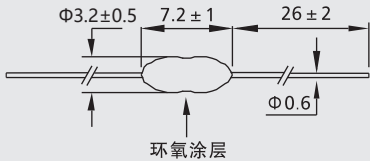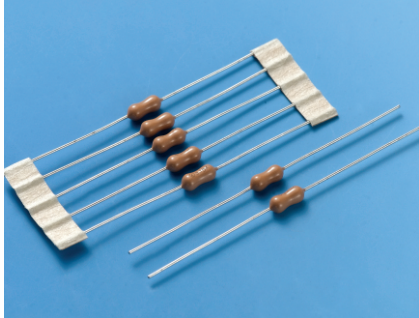

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

工作温度:

Operating Temperature:
-55°C ~ +125°C


材料:

Materials:
End cap:nickel plated brass
Ceramic tube:ceramic
Lead wire:tinned copper wire
Coat:epoxy resin

焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

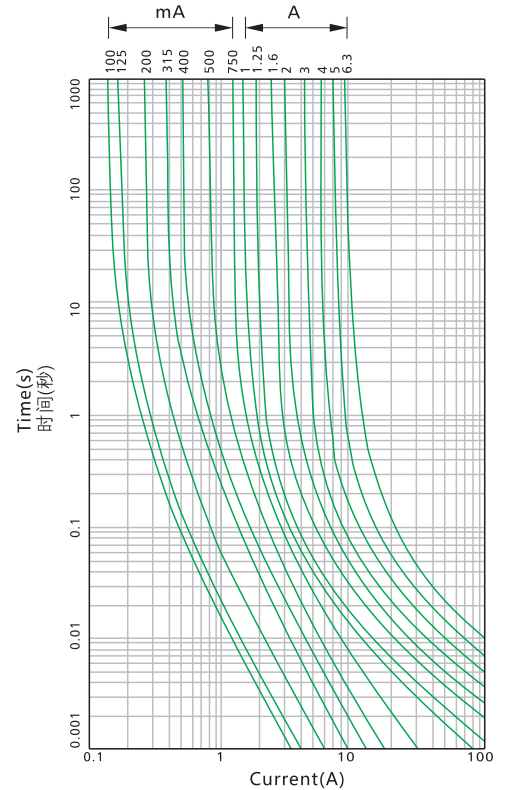

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max (小于60秒)
1000%	10 ms Min (大于10毫秒)

目录编号: Catalog No.A:250V B:125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals						
				UL	cUL	VDE	CCC	PS E JET	TUV	CE
2E0100A/B	100mA	250/125V	0.010	●	●					
2E0125A/B	125mA	250/125V	0.020	●	●					
2E0160A/B	160mA	250/125V	0.040	●	●					
2E0200A/B	200mA	250/125V	0.006	●	●	●	●		●	●
2E0250A/B	250mA	250/125V	0.09	●	●	●	●		●	●
2E0300A/B	300mA	250/125V	0.12	●	●				●	●
2E0315A/B	315mA	250/125V	0.15	●	●	●	●		●	●
2E0350A/B	350mA	250/125V	0.19	●	●				●	●
2E0400A/B	400mA	250/125V	0.31	●	●	●	●		●	●
2E0500A/B	500mA	250/125V	0.46	●	●	●	●		●	●
2E0630A/B	630mA	250/125V	0.78	●	●	●	●		●	●
2E0750A/B	750mA	250/125V	0.93	●	●				●	●
2E0800A/B	800mA	250/125V	1.1	●	●	●	●		●	●
2E1100A/B	1A	250/125V	1.3	●	●	●	●	●	●	●
2E1125A/B	1.25A	250/125V	2.6	●	●	●	●		●	●
2E1150A/B	1.5A	250/125V	3.1	●	●				●	●
2E1160A/B	1.6A	250/125V	3.9	●	●		●	●	●	●
2E1200A/B	2A	250/125V	7.2	●	●	●	●	●	●	●
2E1250A/B	2.5A	250/125V	12	●	●	●	●		●	●
2E1300A/B	3A	250/125V	15	●	●				●	●
2E1315A/B	3.15A	250/125V	19	●	●	●	●	●	●	●
2E1350A/B	3.5A	250/125V	24	●	●				●	●
2E1400A/B	4A	250/125V	29	●	●	●	●		●	●
2E1500A/B	5A	250/125V	59	●	●	●	●	●	●	●
2E1630A/B	6.3A	250/125V	90	●	●			●	●	●