




3D $\Phi 3.6 \times 10$ RoHS Compliant

玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V/125V



测试标准:
Testing Standard:
UL248-1 UL248-14


额定分断能力:
Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap: nickel plated brass
Glass tube: glass
Lead wire: tinned copper wire
Inner cap: nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

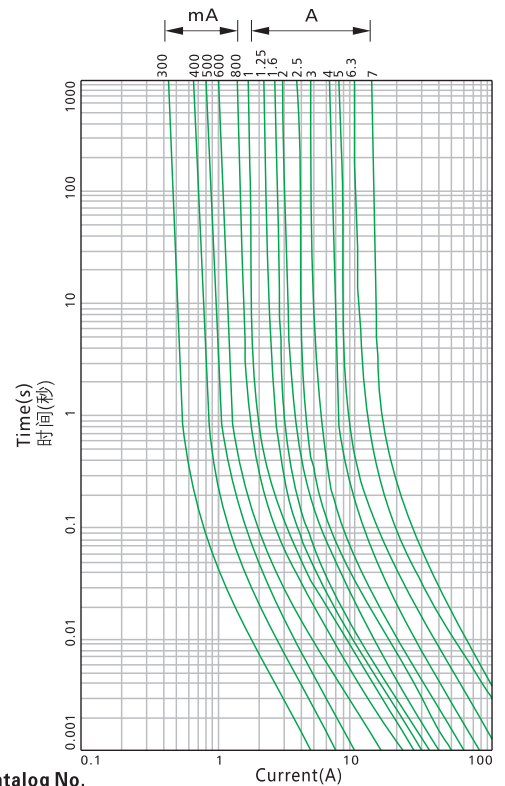

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)

目录编号: Catalog No. A:250V B:125V 带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals	
3D0100A/BP	100mA	250/125V	0.0015	●	●
3D0125A/BP	125mA	250/125V	0.0025	●	●
3D0160A/BP	160mA	250/125V	0.0042	●	●
3D0200A/BP	200mA	250/125V	0.0065	●	●
3D0250A/BP	250mA	250/125V	0.010	●	●
3D0300A/BP	300mA	250/125V	0.018	●	●
3D0315A/BP	315mA	250/125V	0.020	●	●
3D0350A/BP	350mA	250/125V	0.025	●	●
3D0400A/BP	400mA	250/125V	0.035	●	●
3D0500A/BP	500mA	250/125V	0.06	●	●
3D0630A/BP	630mA	250/125V	0.15	●	●
3D0750A/BP	750mA	250/125V	0.35	●	●
3D0800A/BP	800mA	250/125V	0.5	●	●
3D1100A/BP	1A	250/125V	0.6	●	●
3D1125A/BP	1.25A	250/125V	1.2	●	●
3D1150A/BP	1.5A	250/125V	1.6	●	●
3D1160A/BP	1.6A	250/125V	1.8	●	●
3D1200A/BP	2A	250/125V	2.4	●	●
3D1250A/BP	2.5A	250/125V	3.2	●	●
3D1300A/BP	3A	250/125V	6.0	●	●
3D1315A/BP	3.15A	250/125V	7.0	●	●
3D1350A/BP	3.5A	250/125V	7.5	●	●
3D1400A/BP	4A	250/125V	8.0	●	●
3D1500A/BP	5A	250/125V	15	●	●
3D1600A/BP	6A	250/125V	24	●	●
3D1630A/BP	6.3A	250/125V	28	●	●
3D1700A/BP	7A	250/125V	36	●	●

● 表示已获认证
● 表示认证中