



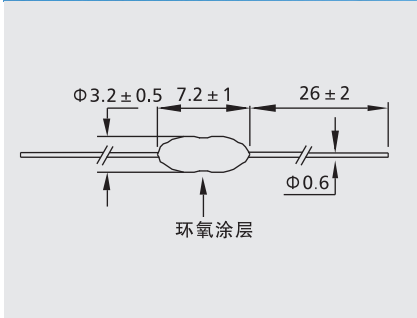

2D Φ3x7 RoHS Compliant

超小型保险丝(快断型) Micro Fuse (Fast-Acting) 250V/125V

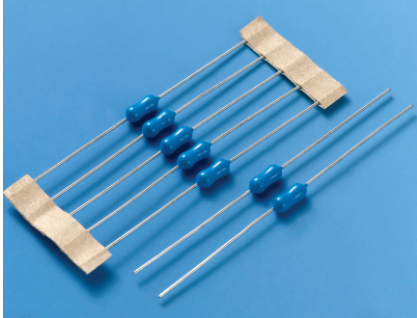

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

工作温度:

Operating Temperature:
-55°C ~ +125°C


材料:

Materials:
End cap: nickel plated brass
Ceramic tube: ceramic
Lead wire: tinned copper wire
Coat: epoxy resin

焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

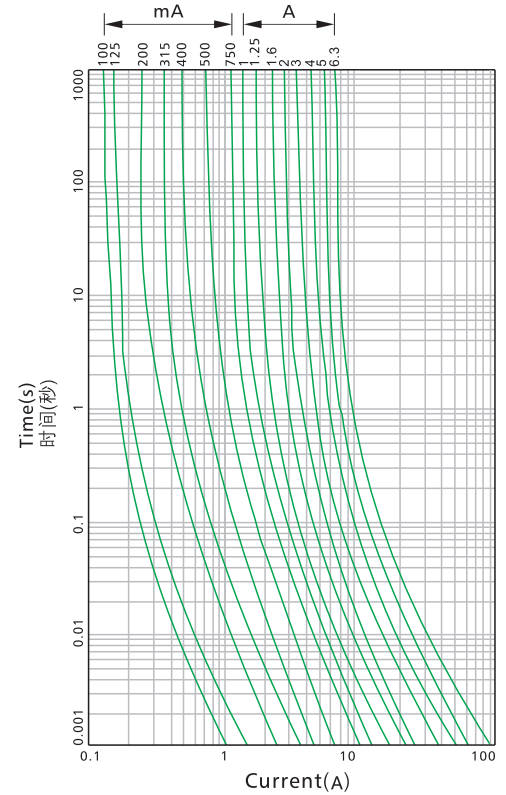

电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time |
|---------------------------|---------------------|
| 100% | 4 hours Min (大于4小时) |
| 200% | 60 s Max (小于60秒) |

目录编号: Catalog No.A:250V B:125V

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | 熔化热能 ² Melting Integral (A ² .S) | 认证 Approvals | | |
|------------------------|--------------------------|---------------------------|--|---|---|---|
| | | | |  |  |  |
| 2D0100A/B | 100mA | 250/125V | 0.001 | ● | ● | |
| 2D0125A/B | 125mA | 250/125V | 0.002 | ● | ● | |
| 2D0160A/B | 160mA | 250/125V | 0.003 | ● | ● | |
| 2D0200A/B | 200mA | 250/125V | 0.006 | ● | ● | |
| 2D0250A/B | 250mA | 250/125V | 0.012 | ● | ● | ● |
| 2D0300A/B | 300mA | 250/125V | 0.016 | ● | ● | ● |
| 2D0315A/B | 315mA | 250/125V | 0.019 | ● | ● | ● |
| 2D0350A/B | 350mA | 250/125V | 0.022 | ● | ● | ● |
| 2D0400A/B | 400mA | 250/125V | 0.035 | ● | ● | ● |
| 2D0500A/B | 500mA | 250/125V | 0.047 | ● | ● | ● |
| 2D0630A/B | 630mA | 250/125V | 0.056 | ● | ● | ● |
| 2D0750A/B | 750mA | 250/125V | 0.078 | ● | ● | ● |
| 2D0800A/B | 800mA | 250/125V | 0.098 | ● | ● | ● |
| 2D1100A/B | 1A | 250/125V | 0.3 | ● | ● | ● |
| 2D1125A/B | 1.25A | 250/125V | 0.5 | ● | ● | ● |
| 2D1150A/B | 1.5A | 250/125V | 0.6 | ● | ● | ● |
| 2D1160A/B | 1.6A | 250/125V | 0.8 | ● | ● | ● |
| 2D1200A/B | 2A | 250/125V | 1.2 | ● | ● | ● |
| 2D1250A/B | 2.5A | 250/125V | 2.0 | ● | ● | ● |
| 2D1300A/B | 3A | 250/125V | 2.5 | ● | ● | ● |
| 2D1315A/B | 3.15A | 250/125V | 2.9 | ● | ● | ● |
| 2D1350A/B | 3.5A | 250/125V | 3.1 | ● | ● | ● |
| 2D1400A/B | 4A | 250/125V | 4.2 | ● | ● | ● |
| 2D1500A/B | 5A | 250/125V | 7.2 | ● | ● | ● |
| 2D1630A/B | 6.3A | 250/125V | 12 | ● | ● | ● |

● 表示已获认证
● 表示认证中