




5Q $\Phi 5.2 \times 20$ RoHS Compliant

玻璃保险丝管(延时型)



Glass Tube Fuse (Time-Lag) 250V/125V

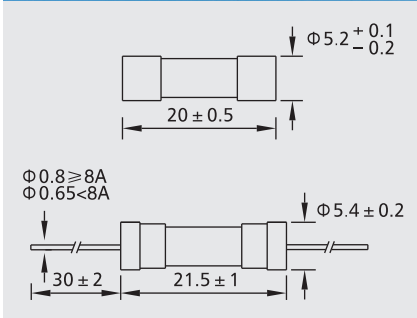

测试标准:
Testing Standard:
 METI Ordinance Article 1

额定分断能力:
Interrupting Rating:
 500 Amperes at 125V AC
 100 Amperes at 250V AC

工作温度:
Operating Temperature:
 $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

材料:
Materials:
 End cap: nickel plated brass
 Glass tube: glass
 Lead wire: tinned copper wire
 Inner cap: nickel plated brass

焊接方法:
Soldering Method:
 Wave soldering: 260°C , 10s max
 Manual soldering: 350°C , 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
130%	1 hours Min (大于1小时)
160%	1 hour Max (小于1小时)
200%	120 s Max (小于120秒)
1000%	10 ms Min (大于10毫秒)

目录编号: Catalog No. A:250V B:125V 带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals
				● 表示已获认证 ● 表示认证中
5Q1100A/B	1A	250/125V	1.1	●
5Q1125A/B	1.25A	250/125V	1.9	●
5Q1150A/B	1.5A	250/125V	3.0	●
5Q1160A/B	1.6A	250/125V	3.5	●
5Q1200A/B	2A	250/125V	6.2	●
5Q1250A/B	2.5A	250/125V	11	●
5Q1300A/B	3A	250/125V	20	●
5Q1315A/B	3.15A	250/125V	28	●
5Q1350A/B	3.5A	250/125V	30	●
5Q1400A/B	4A	250/125V	42	●
5Q1500A/B	5A	250/125V	64	●
5Q1600A/B	6A	250/125V	98	●
5Q1630A/B	6.3A	250/125V	204	●
5Q1800A/B	8A	250/125V	456	●
5Q2100A/B	10A	250/125V	583	●
5Q2120A/B	12A	250/125V	659	●
5Q2150A/B	15A	250/125V	968	●

Time-Current Characteristics
 电流-时间曲线图

