



# 24E RoHS Compliant

## 贴片保险丝(抗浪涌型) SMD Fuse (High Inrush Current Withstand) 250V/125V



**测试标准:**  
**Testing Standard:**  
 UL248-1 UL248-14


**额定分断能力:**  
**Interrupting Rating:**  
 50 Amperes at 350V/300V/250V AC(100mA~20A)  
 50 Amperes at 125V AC/DC(100mA~20A)

**工作温度:**  
**Operating Temperature:**  
 -55°C ~ +125°C

**材料:**  
**Materials:**  
 End cap: Ag plated brass  
 Ceramic tube: ceramic

**焊接方法:**  
**Soldering Method:**  
 Reflow soldering: 260°C, 10s max  
 Manual soldering: 380°C, 3s max


**包装:**  
**Packaging:**  
 Automaton taped 1000PCS per reel,  
 30000PCS per carton



### 电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	<120s

Time-Current Characteristics  
 电流-时间曲线图

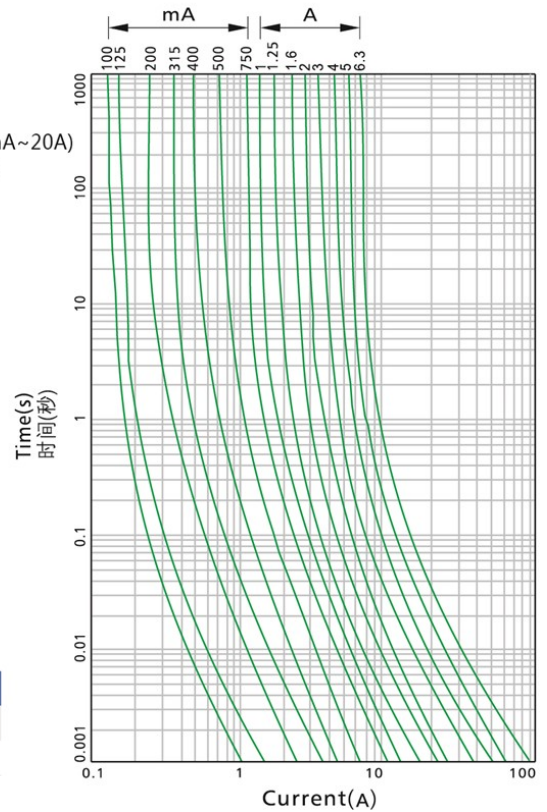

### 目录编号: Catalog No. H:350V G:300V A:250V B:125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 I <sup>2</sup> T Melting Integral (A <sup>2</sup> ·s)	认证 Approvals				
				●表示已获认证 ●表示认证中	CULUS	CQC	VDE	PS JET
24E0125H/G/A/B	125mA	350V/300V/250V/125V	0.06	●				
24E0160H/G/A/B	160mA	350V/300V/250V/125V	0.08	●				
24E0200H/G/A/B	200mA	350V/300V/250V/125V	0.09	●				
24E0250H/G/A/B	250mA	350V/300V/250V/125V	0.11	●				
24E0315H/G/A/B	315mA	350V/300V/250V/125V	0.14	●				
24E0400H/G/A/B	400mA	350V/300V/250V/125V	0.26	●				
24E0500H/G/A/B	500mA	350V/300V/250V/125V	0.5	●	●	●		●
24E0630H/G/A/B	630mA	350V/300V/250V/125V	0.8	●	●	●		●
24E0750H/G/A/B	750mA	350V/300V/250V/125V	1.3	●				
24E0800H/G/A/B	800mA	350V/300V/250V/125V	1.5	●	●	●		●
24E1100H/G/A/B	1A	350V/300V/250V/125V	2.3	●	●	●	○	●
24E1125H/G/A/B	1.25A	350V/300V/250V/125V	3.2	●	●	●	○	●
24E1150H/G/A/B	1.5A	350V/300V/250V/125V	5.6	●	●	●	○	●
24E1160H/G/A/B	1.6A	350V/300V/250V/125V	5.9	●	●	●	○	●
24E1200H/G/A/B	2A	350V/300V/250V/125V	7.8	●	●	●	○	●
24E1250H/G/A/B	2.5A	350V/300V/250V/125V	10	●	●	●	○	●
24E1300H/G/A/B	3A	350V/300V/250V/125V	22	●			○	●
24E1315H/G/A/B	3.15A	350V/300V/250V/125V	23	●	●	●	○	●
24E1350H/G/A/B	3.5A	350V/300V/250V/125V	26	●			○	●
24E1400H/G/A/B	4A	350V/300V/250V/125V	39	●	●		○	●
24E1500H/G/A/B	5A	350V/300V/250V/125V	58	●	●		○	●
24E1600H/G/A/B	6A	350V/300V/250V/125V	95	●				●
24E1630H/G/A/B	6.3A	350V/300V/250V/125V	110	●	●			
24E1700H/G/A/B	7A	350V/300V/250V/125V	120	●				
24E2100H/G/A/B	10A	350V/300V/250V/125V	150	●				
24E2120H/G/A/B	12A	350V/300V/250V/125V	180	●				
24E2150H/G/A/B	15A	350V/300V/250V/125V	195	●				